


# MIBO-SOLDERSEAL

HEAT SHRINK SOLDER SLEEVES WITH  
INNER SOLDERING RING AND  
THERMOPLASTICALLY SEALING RING

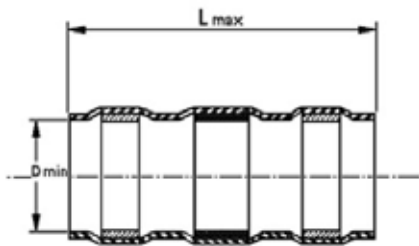

## APPLICATION

The heat-shrinking solder sleeve provides a reliable, insulated electrical connection. Due to its transparent heat shrink tube-insulation checking the solder joint is possible at any time. The solder sleeve is especially well-suited for shield-connectors or wire connections.

## APPLICATION

- 55°C to +125°C

## STANDARD SIZES

Description	wires dimension		sealing rings		color	
	length (mm)	ID (mm)	min.	max.		
9071341	26	18-16	0,4	1,7	1	transparent
9071342	42	14	1,3	2,7	1	red
9071343	42	10	1,8	4,5	1	blue
9071344	42	5,26	2,8	6,0	1	yellow

# MIBO-SOLDERSEAL

## PROPERTIES

Solder:	Copper
Lead-free:	No
Contact material solder:	Tin
Heat shrink tube:	Polyolefin
Insulating resistance:	1,00 GΩ

## PACKAGING

Packed in plastic bags with 100 or 200 pieces.  
Special sizes on request.

## PROCESSING NOTE

The implementation of the solder sleeves should be carried out with a hot air blower (e.g. HG3000 SLE).  
To ensure an even heating we recommend an additional reflector (e.g. HG3000RFL L1-9).

## HOW TO REACH US

mibostahl  
tools, trading and service GmbH  
Hochofenstrasse 6  
58135 Hagen | Germany  
Fon +49 (0) 2331 377578-0  
Fax +49 (0) 2331 377578-20  
info@mibostahl.de  
mibostahl.com

